

REPLACEMENT / ALTERATION MEASURING FORM

DEALER INFORMATION

DEALER CODE: _____ DATE: _____
 COMPANY NAME: _____
 ADDRESS: _____
 CITY: _____ STATE: _____ ZIP: _____
 NEW JOB NAME: _____
 PO#: _____

SHIPPING INSTRUCTIONS

SHIP TO: _____
 ADDRESS: _____
 CITY: _____ STATE: _____ ZIP: _____

- ESTIMATE (Default if no box checked)
 ORDER USE CREDIT CARD ON FILE
 ADDITIONAL INFORMATION

For job previously submitted # _____

NOTE: If a cover is sent to LOOP-LOC for possible replacement, and is returned with no work done, a one-time \$96.00 inspection and handling fee will be charged. All covers returned to LOOP-LOC MUST be cleaned and dry on both sides or a \$210.00 cleaning fee will be charged.

SUPER DENSE MESH COVERS

- SUPER DENSE MESH GREEN SAFETY COVER
 SUPER DENSE MESH DESIGNER COLOR SAFETY COVER:
 Blue Black Gray Tan

ULTRA-LOC III SOLID COVERS

(No Drains, Loop-Loc's Automatic Cover Pump

must be purchased at an additional cost to be considered as a Safety Cover.)

- SOLID GREEN WITH DRAINS SOLID GREEN NO DRAINS WITH PUMP:
 SOLID DESIGNER COLOR:
 Blue Tan Gray
 AQUA-XTREME MESH:
 Green Sapphire Navy
 LOOP-LOC ON-GROUND SWIMMING POOL COVER
 Deck must be self supporting.
 On-Ground Brackets Wood Deck Anchors

REPLACEMENT COVER - Show existing anchor placement or return old cover, freight pre-paid. Specify if new hardware is required. (Return old cover whenever possible)

Note: Anchor bungee covers can not be used for replacement, pool/anchors must be A-B measured.

- New Anchors New Springs Pipe (Up Charge)
 No Anchors No Springs

Old Cover will be sent in if ordered

(Provide rough estimate, based on information given). For a Rough Estimate, please provide sketch, Total length of Raised Walls, Number of Cut Outs, Grid Size and Overall Length and Width.

ORIGINAL LOOP-LOC ORDER # _____

Replace Cover as is

Alter Cover as per marks and instructions. If Springs are not removed prior to shipping a Spring Removal Charge of \$75.00 will be added.

HARDWARE REQUIRED

- Brass Anchors *On-Ground Bracket _____ *9" Pipe w/ Anchor *Stainless Steel Anchors
 *Masonry Anchor Collars *Wood Deck Anchors _____ *15" Pipe w/ Anchor *Stainless Steel Masonry Anchor Collars
 *Commercial Springs * Upcharge

Only Use This Section If Extra Hardware is Required

Please note any additional hardware with quantities here: _____ / _____ / _____ / _____

COMPANY NAME: _____

JOB NAME/P.O.#: _____

**** DISTANCE FROM POINT "A" TO POINT "B" = _____ ****

Anchors And Pool Must Be Measured From The Same Baseline. Baseline must be 3' back from any anchor.

"A-B" Measurements cannot be used unless this distance is given!

ANCHOR POINTS

A		B		A		B		A		B		A		B	
1			16				31				46				61
2			17				32				47				62
3			18				33				48				63
4			19				34				49				64
5			20				35				50				65
6			21				36				51				66
7			22				37				52				67
8			23				38				53				68
9			24				39				54				69
10			25				40				55				70
11			26				41				56				71
12			27				42				57				72
13			28				43				58				73
14			29				44				59				74
15			30				45				60				75

REQUIRED INFORMATION!

POINT TO POINT CROSS DIMENSIONS

PT. _____ to PT. _____

Distance = _____

PT. _____ to PT. _____

Distance = _____

PT. _____ to PT. _____

Distance = _____

PT. _____ to PT. _____

Distance = _____

Coping Size _____

Is Coping Rough? YES NO

Price w / Rolls of "Undr Covr" Padding?

YES NO

Price w / Sewn "Undr Covr" Padding?

YES NO

LOOP-LOC Pipe wanted For Entire Cover?

YES NO

Number of Pipes needed. _____

POOL POINTS

A		B		A		B		A		B		A		B	
1			16				31				46				61
2			17				32				47				62
3			18				33				48				63
4			19				34				49				64
5			20				35				50				65
6			21				36				51				66
7			22				37				52				67
8			23				38				53				68
9			24				39				54				69
10			25				40				55				70
11			26				41				56				71
12			27				42				57				72
13			28				43				58				73
14			29				44				59				74
15			30				45				60				75

What is Corner Radius? _____

RAISED AREAS

Begins @ PT. # _____ Ends @ PT. # _____

Begins @ PT. # _____ Ends @ PT. # _____

Begins @ PT. # _____ Ends @ PT. # _____

Begins @ PT. # _____ Ends @ PT. # _____

Please note: Loop-Loc's Cable-loc Safety

Barrier will be used in Raised Wall Area,

Existing Eyebolts Must Be Replaced With

Cable Wall Anchors.

Up and Overs

PT. # _____ Height _____

PT. # _____ Height _____

PT. # _____ Height _____


PT. # _____ Height _____

PT. # _____ Height _____

REPLACEMENT/ALTERATION MEASURING INSTRUCTIONS

Measure Existing Cover:


1. Begin with a freehand sketch of the cover and pool.
2. Measure the overall length and width of the cover.
3. Measure all grid sections along the width and length of the cover.
4. Measure all the cover edges from corner to corner.
5. Measure the distance the anchors are set back from poolline. Indicate on sketch any anchors that are less than 16" from poolline or more than 24" from cover.
6. Measure cover overlap.

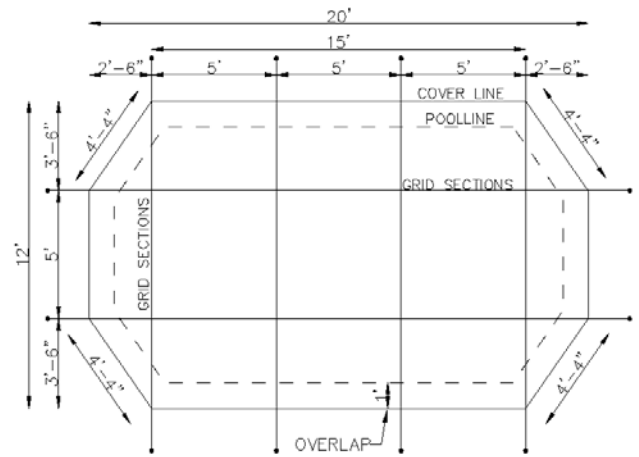

A-B Measure of Pool & Anchors:

*Anchors and Pool must be measured from same baseline
A-B line must be at least 3' back from any anchor*

1. Begin with a freehand sketch indicating pool shape, obstructions and location of AB line.
2. Take AB measurements to each anchor on deck.
3. Take AB measurements around entire pool and to any obstructions within 3' of the pool

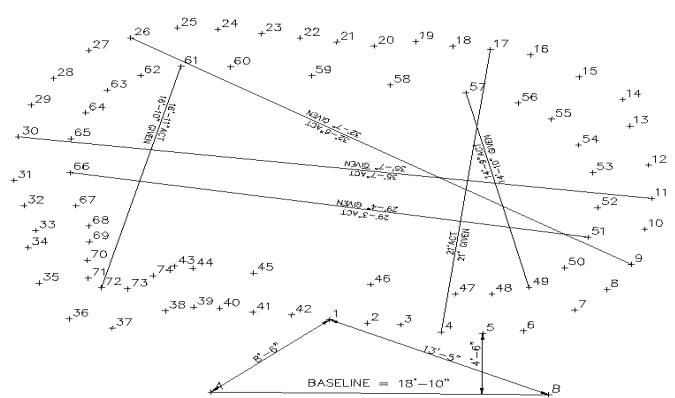

MARKING COVER INSTRUCTIONS FOR ALTERATIONS

Use a black marker or light colored lumber crayon to mark cover. Do not place notes on the cover.

1. If adding or taking away material show arrow in the correct direction and write dimension of amount of material to be added or taken away next to arrow.
2. Mark start and end point for raised walls, cut outs and steps.
3. New drain and pad locations should be marked with an X at the center location of where the pad or drain is wanted. Standard drain/pad sizes will be used unless otherwise noted
4. Give a detailed description of alteration on measure form.

